

# DEALER HOT WATER PRESSURE WASHERS

## Skid Gasoline/Diesel

### Belt Drive | HVS Series



*Just as powerful as the HDS Series, the HVS Series offers some of the same features at a more affordable option. Just as effective for tough cleaning applications with the same durable heavy-duty wrap around frame.*



#### Pump

- Belt drive triplex piston General pump with ceramic plungers
- 80-mesh, high-volume, stainless-steel screen inlet water strainer

#### Engine

- Performance proven industrial gasoline or diesel engine with electric start – battery not included

#### Frame

- Heavy-duty powder coated steel square tube skid frame

#### Components


- No. 1 or No. 2 diesel or kerosene fired burner (Not approved for bio-fuel)
- 2900-watt generator for efficient power to the burner and controls
- Horizontal schedule 80 pipe coil
- High quality fuel filter/water separator ensures clean fuel supply
- Pressure relief valve protects against excessive system pressure
- Polyethylene burner and engine fuel tanks

#### Miscellaneous

- Temperature rise 150°F/66°C above ambient, maximum outlet temperature is 200°F

#### Unit Includes:

- Quick connect nozzles – 0°, 15°, 25°, 40° and fixed detergent nozzle
- 50-foot x 3/4-inch steel wire-braided high pressure hose
- Adjustable pressure insulated dual lance with fixed detergent nozzle
- Professional-grade insulated trigger gun with safety lock-off

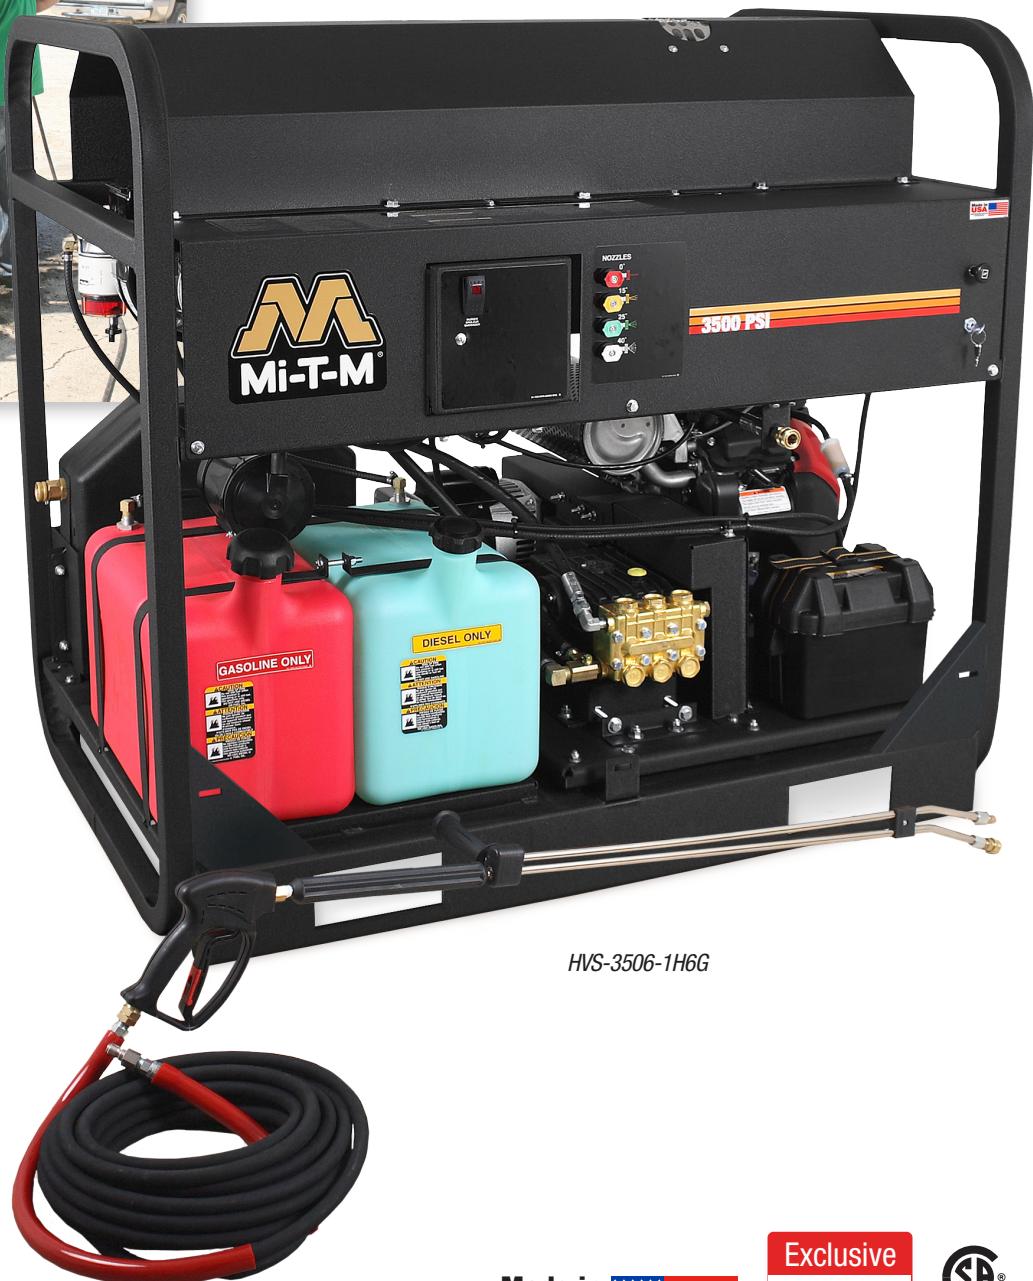

HVS-3506-1H6G



# DEALER HOT WATER PRESSURE WASHERS

## Skid Gasoline/Diesel

### Belt Drive | HVS Series



#### Gasoline Models

Model Number	PSI	GPM	Displacement/Engine	Engine Fuel Tank Capacity	Burner Fuel Tank Capacity	Burner Fuel Consumption	BTU per hour	Dimensions (LxWxH)	Ship Wt.	Net Wt.
HVS-3005-0V6G	3000	4.8	480cc Vanguard OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	50x34x46in.	816 lb.	710 lb.
HVS-3008-1H6G	3000	7.8	GX690 Honda OHV	10.0 gallons	10.0 gallons	3.67 gph	513,800	50x34x46in.	854 lb.	750 lb.
HVS-3008-0K6G	3000	7.8	725cc Kohler CH730 OHV	10.0 gallons	10.0 gallons	3.67 gph	513,800	50x34x46in.	934 lb.	854 lb.
HVS-3505-1H6G	3500	4.7	GX630 Honda OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	50x34x46in.	854 lb.	750 lb.
HVS-3505-0K6G#	3500	4.7	624cc Kohler CH620 OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	50x34x46in.	854 lb.	750 lb.
HVS-3506-1H6G	3500	5.6	GX630 Honda OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	50x34x46in.	864 lb.	760 lb.
HVS-3506-0K6G	3500	5.6	725cc Kohler CH730 OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	50x34x46in.	864 lb.	760 lb.

# Higher performance 624cc Kohler engine.

#### Diesel Models

Model Number	PSI	GPM	Horsepower/Engine	Engine Fuel Tank Capacity	Burner Fuel Tank Capacity	Burner Fuel Consumption	BTU per hour	Dimensions (LxWxH)	Ship Wt.	Net Wt.
HVS-3006-0B7G	3000	5.6	16.8 HP Kubota Z602 OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	56.5x34x46in.	940 lb.	836 lb.
HVS-3008-0B7G	3000	7.8	24.8 HP Kubota D902 OHV	10.0 gallons	10.0 gallons	3.67 gph	513,800	56.5x34x46in.	940 lb.	836 lb.
HVS-4005-0B7G	4000	4.5	16.8 HP Kubota Z602 OHV	10.0 gallons	10.0 gallons	3.37 gph	471,800	56.5x34x46in.	940 lb.	836 lb.

#### Options:

Part Number	Description	Fits Models
HX-0130	<b>Three-way ball valve</b> - Allows the pressure washer to be operated from garden hose, float tank or trailer supply tank by adjusting ball valve lever	All models
HX-0131	<b>High pressure detergent injector (K7)</b> - Supplies soap injection through the high pressure pump while spraying; pressure washers with K7 flow actuated unloaders only	HVS-3005-0V6G, HVS-3006 & 3500-PSI models
HX-0133	<b>Steam combination 250°F (K7)</b> - Increases outlet temperature to 250°F. Steam option for models equipped with K7 flow actuated unloaders	HVS-3005-0V6G & HVS-3505 models
HX-0135	<b>Steam combination 250°F (K7)</b> - Increases outlet temperature to 250°F. Steam option for models equipped with K7 flow actuated unloaders	HVS-3506-1H6G
HX-0136	<b>Steam combination 250°F (K7)</b> - Increases outlet temperature to 250°F. Steam option for models equipped with K7 flow actuated unloaders	HVS-3006-0B7G
HX-0138 *	<b>Steam combination 250°F</b> - Increases outlet temperature to 250°F	HVS-3005-0V6G
HX-0139 *	<b>Steam combination 250°F</b> - Increases outlet temperature to 250°F	HVS-3505 models
HX-0140 *	<b>Steam combination 250°F</b> - Increases outlet temperature to 250°F	HVS-3506-1H6G
HX-0141 *	<b>Steam combination 250°F</b> - Increases outlet temperature to 250°F	HVS-3006-0B7G
HX-0142	<b>Steam combination 250°F</b> - Increases outlet temperature to 250°F	HVS-4005-0B7G
HX-0143	<b>Trapping unloader</b> - For hose runs longer than 50-feet and for cleaning elevated areas	HVS-3006 & HVS-3506 models
HX-0145	<b>Adjustable thermostat</b> - Operator is able to adjust outlet water temperature between 86°F-248°F	All models
HX-0146	<b>Hour meter</b> - Displays the number of hours unit has been in operation	All models
HX-0147	<b>Four point lifting capability</b> - Allows unit to be lifted by a crane	All models
HX-0148 *	<b>Adjustable detergent valve</b> - Adds the adjustable detergent valve to the control panel for the high pressure soap	HVS-3005-0V6G, HVS-3008 models & HVS-3506-1H6G
HX-0149 *	<b>Dual gun</b> - Two guns may be sprayed at the same time, flow is divided between the two guns while each operator maintains equal system pressure	HVS-3006 & HVS-3506 models
HX-0198	<b>Stainless-steel frame</b> - Converts powder coated painted frame to stainless-steel material	All models
HX-0200	<b>Trapping unloader</b> - For hose runs longer than 50-feet and for cleaning elevated areas	HVS-3005-0V6G & HVS-3505 models
HX-0202	<b>Dual gun</b> - Two guns may be sprayed at the same time, flow is divided between the two guns while each operator maintains equal system pressure	HVS-3008 models
HX-0257	<b>Clutch drive pump</b> - Stops the pump from spinning in bypass mode and helps to extend the life of the pump; changes GPM to 4.3 when added to unit	HVS-3005-0V6G
HX-0258	<b>Clutch drive pump</b> - Stops the pump from spinning in bypass mode and helps to extend the life of the pump; changes GPM to 4.2 when added to unit	HVS-3505 models
HX-0263	<b>Clutch drive pump</b> - Stops the pump from spinning in bypass mode and helps to extend the life of the pump; standard flow rate	HVS-3008 & HVS-4005 gasoline models
HX-0264	<b>Clutch drive pump</b> - Stops the pump from spinning in bypass mode and helps to extend the life of the pump; standard flow rate	HVS-3005 & HVS-3505 models
HX-0265	<b>Clutch drive pump</b> - Stops the pump from spinning in bypass mode and helps to extend the life of the pump; standard flow rate	HVS-3506 models

\*Requires trapping unloader.

Note: To order options HX-0138 to HX-0141 or HX-0149 you must order option HX-0143 or HX-0200.

#### Accessories:

Part Number	Description	Fits Models
20-1070A18	<b>Removable painted front panel</b> - Provides a protective panel and gives unit a more finished look	All models
20-1366A52	<b>Black powder coated painted rain cap</b> - Protects boiler from moisture build-up when unit is left outside, octagonal	All models
50-0177	<b>Stack adapter</b> - Allows 8-inch flue pipe to be installed to boiler exhaust port	All models
850-0324	<b>Gasket (For 50-0177)</b> - Seals between 50-0177 stack and boiler housing	All models
AW-5740-0000	<b>Wheel kit</b> - Allows unit to become portable	All models
AW-6000-1006	<b>Hot water skid equipment cover</b> - Keeps your equipment clean, dry and looking like new, made from 600-denier vinyl-backed polyester, water resistant, drawstrings to secure cover, Mi-T-M logo	All models
AW-6000-1007	<b>Hot water skid equipment cover</b> - Keeps your equipment clean, dry and looking like new, made from 600-denier vinyl-backed polyester, water resistant, drawstrings to secure cover, no logo	All models

POWERED by **HONDA**